




Rec'd PCT/PTO 10 JAN 2005
PCT/GB 2003 / 002135



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

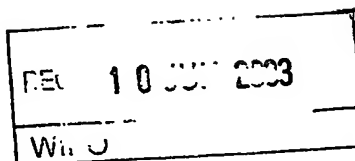

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 21 August 2002

BEST AVAILABLE COPY

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

SMC 60533/GB/PI

2. Patent application number

(The Patent Office will fill in this part)

0217448.0

27 JUL 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Avecia Limited
Hexagon House
Blackley
Manchester, M9 8ZS
United Kingdom

Patents ADP number (if you know it)

07764137001 /

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

INK

5. Name of your agent (if you have one)

MAYALL, John

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Avecia Limited
Hexagon House
Blackley
Manchester, M9 8ZS
United Kingdom

Patents ADP number (if you know it)

62443130074

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	09
Claim(s)	01
Abstract	01
Drawing(s)	

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Avecia Limited Authorised Signatory

Date 25 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs K.M. Pinder/Miss G. Terry 0161 721 1361/2

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

SMC 60533

APPLICANTS

Avecia Limited

TITLE

INK

INK


This invention relates to inks and to their use in ink jet printing ("IJP"). IJP is a non-impact printing technique in which droplets of ink are ejected through a fine nozzle onto a substrate without bringing the nozzle into contact with the substrate.

There are many demanding performance requirements for inks used in IJP. For example they desirably provide sharp, non-feathered images having good water-fastness, light-fastness and optical density. The inks are often required to dry quickly when applied to a substrate to prevent smudging, but they should not form a crust over the tip of an ink jet nozzle because this will stop the printer from working. The inks should also be stable to storage over time without decomposing or forming a precipitate which could block the fine nozzle.

WO 01/48090 relates to metal chelate azo compounds which comprise a naphthol component and certain heterocyclic groups. WO 01/48090 does not disclose such compounds further substituted by a triazole ring for use in ink formulations.

According to a first aspect of the present invention there is provided an ink comprising:

(a) A metal chelate compound of Formula (1) or salt thereof, wherein M is nickel;

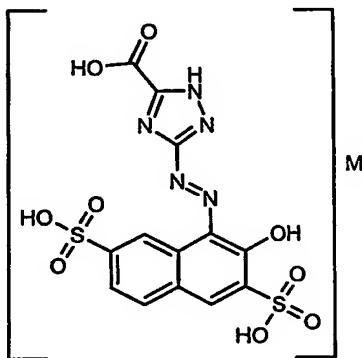

Formula (1)

and (b) a liquid medium.

It is especially preferred that the inks comprising the compound of Formula (1) are magenta in colour.

The inks comprising the compound of Formula (1) provide prints which exhibit a high light-fastness, good fastness to oxidising gases such as ozone and good optical density, particularly when used for ink jet printing. The inks according to the present invention are also highly soluble which improves operability and reduces crusting and nozzle blockage when inks containing the compounds are used in an ink jet printer.

It is especially preferred that the compound of Formula (1) is in the form of a sodium, lithium, potassium, ammonium or substituted ammonium salt, because we have

found that these salts provide prints which exhibit a high light-fastness when incorporated into an ink jet printing ink.

The compound of Formula (1) may be converted into a salt using known techniques. For example, an alkali metal salt of a compound may be converted into a salt with ammonia or an amine by dissolving an alkali metal salt of the dye in water and passing the solution through a column of a suitably modified ion exchange resin.

The inks according to the present invention may be, and preferably are, purified to remove undesirable impurities before they are incorporated into inks for ink jet printing. Conventional techniques may be employed for purification, for example ultrafiltration, reverse osmosis and/or dialysis.

The liquid medium preferably comprises:

- (i) water;
- (ii) a mixture of water and an organic solvent; or
- (iii) an organic solvent free from water.

The number of parts by weight of component (a) of the ink is preferably from 0.01 to 30, more preferably 0.1 to 20, especially from 0.5 to 15, and more especially from 1 to 5 parts. The number of parts by weight of component (b) is preferably from 99.99 to 70, more preferably from 99.9 to 80, especially from 99.5 to 85, and more especially from 99 to 95 parts. The number of parts of (a) + (b) is 100 and all parts mentioned herein are by weight.

Preferably component (a) is completely dissolved in component (b). Preferably component (a) has a solubility in component (b) at 20°C of at least 10%. This allows the preparation of concentrates which may be used to prepare more dilute inks and reduces the chance of the compound(s) of component (a) of the ink precipitating if evaporation of the liquid medium occurs during storage.

When the liquid medium comprises a mixture of water and an organic solvent, the weight ratio of water to organic solvent is preferably from 99:1 to 1:99, more preferably from 99:1 to 50:50 and especially from 95:5 to 80:20.

It is preferred that the organic solvent present in the mixture of water and organic solvent is a water-miscible organic solvent or a mixture of such solvents. Preferred water-miscible organic solvents include C₁₋₆-alkanols, preferably methanol, ethanol, n-propanol, isopropanol, n-butanol, sec-butanol, tert-butanol, n-pentanol, cyclopentanol and cyclohexanol; linear amides, preferably dimethylformamide or dimethylacetamide; ketones and ketone-alcohols, preferably acetone, methyl ether ketone, cyclohexanone and diacetone alcohol; water-miscible ethers, preferably tetrahydrofuran and dioxane; diols, preferably diols having from 2 to 12 carbon atoms, for example pentane-1,5-diol, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol and thiodiglycol and oligo- and poly-alkyleneglycols, preferably diethylene glycol, triethylene glycol, polyethylene glycol and polypropylene glycol; triols, preferably glycerol and 1,2,6-hexanetriol; mono-C₁₋₄-alkyl ethers of diols, preferably mono-C₁₋₄-alkyl ethers of diols

having 2 to 12 carbon atoms, especially 2-methoxyethanol, 2-(2-methoxyethoxy)ethanol, 2-(2-ethoxyethoxy)-ethanol, 2-[2-(2-methoxyethoxy)ethoxy] ethanol, 2-[2-(2-ethoxyethoxy)-ethoxy]-ethanol and ethyleneglycol monoallylether; cyclic amides, preferably 2-pyrrolidone, N-methyl-2-pyrrolidone, N-ethyl-2-pyrrolidone, caprolactam and 1,3-dimethylimidazolidone; cyclic esters, preferably caprolactone; sulphoxides, preferably dimethyl sulphoxide and sulpholane. Preferably the liquid medium comprises water and 2 or more, especially from 2 to 8, water-miscible organic solvents.

Especially preferred water-soluble organic solvents are cyclic amides, especially 2-pyrrolidone, N-methyl-pyrrolidone and N-ethyl-pyrrolidone; diols, especially 1,5-pentane diol, ethyleneglycol, thiodiglycol, diethyleneglycol and triethyleneglycol; and mono- C₁₋₄-alkyl and C₁₋₄-alkyl ethers of diols, more preferably mono- C₁₋₄-alkyl ethers of diols having 2 to 12 carbon atoms, especially 2-methoxy-2-ethoxy-2-ethoxyethanol.

When the liquid medium comprises an organic solvent free from water, (i.e. less than 1% water by weight) the solvent preferably has a boiling point of from 30° to 200°C, more preferably of from 40° to 150°C, especially from 50 to 125°C. The organic solvent may be water-immiscible, water-miscible or a mixture of such solvents. Preferred water-miscible organic solvents are any of the hereinbefore described water-miscible organic solvents and mixtures thereof. Preferred water-immiscible solvents include, for example, aliphatic hydrocarbons; esters, preferably ethyl acetate; chlorinated hydrocarbons, preferably CH₂Cl₂; and ethers, preferably diethyl ether; and mixtures thereof.

When the liquid medium comprises a water-immiscible organic solvent, preferably a polar solvent is included because this enhances solubility of the metal chelate compound in the liquid medium. Examples of polar solvents include C₁₋₄-alcohols. In view of the foregoing preferences it is especially preferred that where the liquid medium is an organic solvent free from water it comprises a ketone (especially methyl ethyl ketone) and/or an alcohol (especially a C₁₋₄-alkanol, such as ethanol or propanol).

The organic solvent free from water may be a single organic solvent or a mixture of two or more organic solvents. It is preferred that when the medium is an organic solvent free from water it is a mixture of 2 to 5 different organic solvents. This allows a medium to be selected which gives good control over the drying characteristics and storage stability of the ink.

Ink media comprising an organic solvent free from water are particularly useful where fast drying times are required and particularly when printing onto hydrophobic and non-absorbent substrates, for example plastics, metal and glass.

An especially preferred ink comprises:

- (i) 1 to 10 parts in total of the compound of Formula (1) or salt thereof;
- (ii) 2 to 60, more preferably 5 to 40 parts of water-soluble organic solvent; and
- (iii) 30 to 97, more preferably 40 to 85 parts water;

wherein all parts are by weight and the sum of the parts (i) + (ii) + (iii) = 100.

When the liquid medium in the ink comprises a mixture of water and an organic solvent; or an organic solvent free from water, component (i) of the ink may comprise a compound of the Formula (1) or salt thereof, as hereinbefore defined.

5 Preferred low melting solid media have a melting point in the range from 60°C to 125°C. Suitable low melting point solids include long chain fatty acids or alcohols, preferably those with C₁₈₋₂₄ chains, and sulphonamides. A compound of Formula (1) may be dissolved in the low melting point solid or may be finely dispersed in it.

10 The inks according to the present invention may also contain additional components conventionally used in ink jet printing inks, for example viscosity and surface tension modifiers, corrosion inhibitors, biocides, fogation reducing additives, anti-cockle agents to reduce paper curling and surfactants which may be ionic or non-ionic.

The pH of the ink is preferably from 4 to 11, more preferably from 7 to 10.

15 The viscosity of the ink at 25°C is preferably less than 50cP, more preferably less than 20 cP and especially less than 5cP.

A second aspect of the present invention provides a process for printing an image on a substrate comprising applying thereto by means of an ink jet printer an ink according to the first aspect of the present invention. The preferences for the ink used in this process are as hereinbefore defined in relation to the first aspect of the present invention.

20 The ink jet printer preferably applies the ink to the substrate in the form of droplets which are ejected through a small orifice onto the substrate. Preferred ink jet printers are piezoelectric ink jet printers and thermal ink jet printers. In thermal ink jet printers, programmed pulses of heat are applied to the ink in a reservoir by means of a resistor adjacent to the orifice, thereby causing the ink to be ejected in the form of small droplets
25 directed towards the substrate during relative movement between the substrate and the orifice. In piezoelectric ink jet printers the oscillation of a small crystal causes ejection of the ink from the orifice.

The substrate is preferably paper, plastic, a textile, metal or glass, more preferably paper, an overhead projector slide or a textile material, especially paper.

30 Preferred papers are plain or treated papers which may have an acid, alkaline or neutral character. Examples of commercially available papers include, HP Premium Coated Paper, HP Photopaper (all available from Hewlett Packard Inc.), Stylus Pro 720 dpi Coated Paper, Epson Photo Quality Glossy Film, Epson Photo Quality Glossy Paper (available from Seiko Epson Corp.), Canon HR 101 High Resolution Paper, Canon GP
35 201 Glossy Paper, Canon HG 101 High Gloss Film (all available from Canon Inc.), Wiggins Conqueror paper (available from Wiggins Teape Ltd), Xerox Acid Paper and Xerox Alkaline paper, Xerox Acid Paper (available from Xerox).

A third aspect of the present invention provides a substrate, preferably a paper, an overhead projector slide or a textile material, printed with an ink according to the first aspect

of the present invention or by means of the process according to the second aspect of the present invention.


According to a fourth aspect of the present invention there is provided an ink jet printer cartridge comprising a chamber and ink, wherein the ink is present in the chamber and the is as defined in the first aspect of the present invention.

According to an fifth aspect of the present invention there is provided an ink jet printer containing an ink jet printer cartridge, wherein the ink jet printer cartridge is as defined in the fourth aspect of the present invention.

The invention is further illustrated by the following Examples in which all parts and percentages are by weight unless specified otherwise.


Example 1

Compound (1) wherein M is nickel

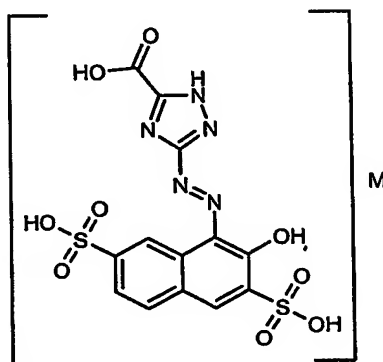

Compound (1)


Stage (a): Preparation of 3-hydroxynaphthalene-2,6-disulfonic acid



7-Hydroxynaphthalene-2-sulfonic acid (250g, 1.16mol) was added in portions to a mixture of concentrated H₂SO₄ (950g) and water (50g). The mixture was stirred at 110 - 120°C for 3 hours, cooled to room temperature, added to a mixture of ice and water (5000ml) and the product precipitated by the addition of sodium chloride. The resultant slurry was warmed to 90°C to dissolve the product, stirred for 1 hour at this temperature and then allowed to cool. The product was filtered off and the damp product dissolved in water (3000ml) at pH 10 by the addition of concentrated sodium hydroxide solution. The

solution was then filtered to remove a small amount of insoluble material. The pH of the filtrate was lowered to 7 with concentrated HCl and the product precipitated by the addition sodium chloride. The product was filtered off and dried in a vacuum oven to give 117g of a cream solid (68% yield).

Stage (b):



3-Amino-1,2,4-triazole-5-carboxylic acid hydrate (3.84g, 0.03mol) was suspended in water (180ml) and dissolved by the addition of 2M NaOH to pH 8. Sodium nitrite (2.27g, 0.033mol) was added and the solution stirred until the sodium nitrite had dissolved.

The mixture was then added dropwise to a cooled mix of ice-water (150g) and concentrated HCl (10ml) at 0-5°C, the mixture was stirred for 30 minutes at 0-5°C and then excess nitrous acid was removed by adding sulphamic acid. The diazo suspension was added slowly to a solution of 3-hydroxynaphthalene-2,6-disulfonic acid (13.4g, 0.03mol) in water (300ml) at pH 7-8 (2N NaOH) and cooled below 5°C. The reaction mixture was then stirred at 0-5°C for one further hour, the product was precipitated by acidification to pH 4 with 2N HCl and collected by filtration. The product was washed with 15% brine solution and then dried in a vacuum desiccator to give 20g of an orange solid (60% yield).

Stage (c): Preparation of Compound (1)

A solution of nickel acetate tetrahydrate (2.5g, 0.01mol) in water (20ml) was added dropwise to the product from stage (b) (7.43g, 0.01mol) dissolved in water (100ml) at pH 7-8 (2N NaOH). The reaction mixture was stirred for 2 hours at 20°C, dialysed using SpectraPor membrane tubing (molecular weight cut off 3500) to low conductivity (<100µs). Compound (1) was obtained by evaporation under reduced pressure to afford a dark solid (5g). Analysis by mass spectrometry found m/z 499 (M-H)⁻. Requires M⁺=500.

Example 2 - Inks

The inks described in Tables I and II may be prepared wherein the Compound described in the first column is the Compound made in Example 1. Numbers quoted in the second column onwards refer to the number of parts of the relevant ingredient and all parts are by weight. The inks may be applied to paper by thermal or piezo ink jet printing.

The following abbreviations are used in Table I and II:

PG = propylene glycol

DEG = diethylene glycol

NMP = N-methyl pyrrolidone

DMK = dimethylketone

IPA = isopropanol

MEOH = methanol

2P = 2-pyrrolidone

MIBK = methylisobutyl ketone

P12 = propane-1,2-diol

BDL = butane-2,3-diol

CET = cetyl ammonium bromide

PHO = Na_2HPO_4 and

TBT = tertiary butanol

TDG = thiodiglycol

TABLE I

Compound	Dye Content	Water	PG	DEG	NMP	DMK	NaOH	Na Stearate	IPA	MEOH	2P	MIBK
1	2.0	80	5		6	4					5	
1	3.0	90		5	5		0.2			5	1	
1	10.0	85	3		3	3						1
1	2.1	91		8					4			5
1	3.1	86	5				0.5		6	10	9	4
1	1.1	81			9	3			10		5	
1	2.5	60	4	15	3	3						
1	5	65		20		5				6		5
1	2.4	75	5	4		10		0.3				
1	4.1	80	3	5	2	6			5	4	6	5
1	3.2	65		5	4					4		
1	5.1	96							5	4		
1	10.8	90	5						1		4	
1	10.0	80	2	6	2	5					15	
1	1.8	80		5	11						5	6
1	2.6	84								2		
1	3.3	80	2			10			3			
1	12.0	90				7	0.3					
1	5.4	69	2	20	2	1					3	3
1	6.0	91			4						5	


TABLE II

Compound	Dye Content	Water	PG	DEG	NMP	CET	TBT	TDG	BDL	PHO	2P	PI2
1	3.0	80	15			0.2					5	
1	9.0	90		5						1.2		5
1	1.5	85	5	5		0.15	5.0	0.2		0.12		
1	2.5	90		6	4							6
1	3.1	82	4	8		0.3						
1	0.9	85		10					5	0.2		
1	8.0	90		5	5			0.3				
1	4.0	70		10	4				1		4	11
1	2.2	75	4	10	3				2		6	
1	10.0	91			6						3	
1	9.0	76		9	7		3.0			0.95	5	
1	5.0	78	5	11							6	
1	5.4	86			7						7	
1	2.1	70	5	5	5	0.1	0.2	0.1	5	0.1	5	
1	2.0	90		10								
1	2	88						10				
1	5	78			5			12			5	
1	8	70	2		8			15			5	
1	10	80						8			12	
1	10	80		10								

CLAIMS

1. An ink comprising:

(a) a metal chelate compound of Formula (1) or salt thereof, wherein M is nickel;

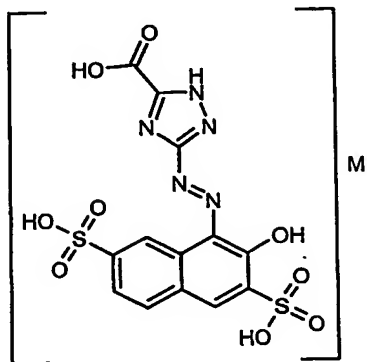

Formula (1)

and (b) a liquid medium.

2. An ink according to claim 1 wherein the liquid medium comprises a mixture of water and an organic solvent.

3. An ink according to claim 1 or 2 comprising

(i) 1 to 10 parts of the compound of Formula (1) or salt thereof;

(ii) 2 to 60 parts of water-soluble organic solvent; and

(iii) 30 to 97 parts water;

wherein all parts are by weight and the sum of parts (i) + (ii) + (iii) = 100.

4. A process for printing an image on a substrate comprising applying thereto by means of an ink jet printer an ink according to any one of claims 1 to 3.

5. A substrate printed with an ink according to any one of claims 1 to 3, or by means of the process according to claim 4.

6. An ink jet printer cartridge comprising a chamber and ink, wherein the ink is present in the chamber and the ink is as defined in any one of claims 1 to 3.


7. An ink jet printer containing an ink jet printer cartridge, wherein the ink jet printer cartridge is as defined in claim 6.

8. An ink substantially as herein described with reference to any of the examples.

ABSTRACT

INK

- 5 An ink comprising:
 (c) a metal chelate compound of Formula (1) or salt thereof, wherein M is nickel;

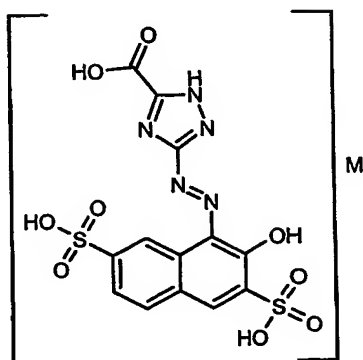

Formula (1)

- 10 and (b) a liquid medium.
 The inks are useful for ink jet printers.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.